


Serie Heavy

SR308F

Nylon cable chain with nylon split cross pieces with holes

Construction with sidebands male/female joining system with triple nylon pin. Standard chain is equipped with nylon cross pieces every second pitch; on request can be assembled every pitch.

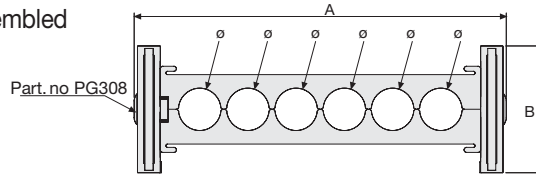

Technical characteristics when self-supported

Speed	8 m/s
Acceleration	40 m/s ²

For higher requirements please consult our technical dept.


A	B	N.	Ø	R	Weight/m	Chain
mm	mm	holes	mm	mm	kg	Part Number
132	75	2	34	150-180-200-230-280-400	3,05	SR308001 □*
220	75	6	25	150-180-200-230-280-400	3,45	SR308002 □*
248	75	5	34	150-180-200-230-280-400	3,60	SR308003 □*
285	75	6	34	150-180-200-230-280-400	3,80	SR308004 □*
132	75	2+1	28-23	150-180-200-230-280-400	3,05	SR308005 □*

*Complete the code by inserting the value of the radius (R): Ex. SR308003 □

Where: 1=150; 2=180; 3=200; 4=230; 5=280; 6=400

Chain equipped with nylon frame every pitch: complete the code by inserting the letter D.

Ex.: SR3080031 □

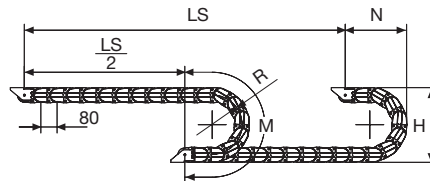

R	H	N	M
mm	mm	mm	mm
150	375	270	635
180	435	300	725
200	475	320	790
230	535	350	885
280	635	400	1040
400	875	520	1420

Length of chain (L)

Half travel distance ($\frac{LS}{2}$)

plus length of curve (M)

$$L = \frac{LS}{2} + M$$



