

**EK6**

# WITH CONICAL CLAMPING RING

4 – 2,150 Nm



## ABOUT

### FEATURES


- high clamping pressure
- self centering on shaft
- very high concentricity

### MATERIAL

- **Hubs:** up to size 450 high strength aluminum; size 800 steel
- **Elastomer:** wear resistant thermally stable TPU

### DESIGN

Two concentrically machined hubs with curved jaws and conical clamping rings. Elastomer segments press fit for zero backlash; standard versions are electrically isolating.

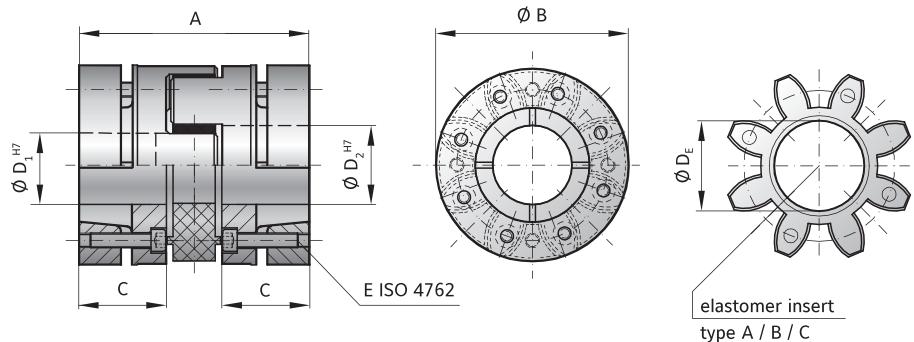

## MODEL EK6

SIZE	10			20			60			150			300			450			800			
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Rated torque (Nm) $T_{KN}$	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240	
Max. torque (Nm) $T_{Kmax}$	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400	
Overall length (mm)	A	42		56		64		76		96		110		138								
Outside diameter (mm) $B/B_1$	32		43		56		66		82		102		136.5									
Mounting length (mm)	C	15		20		23		28		36		42		53								
Inside diameter range H7 (mm) $D_{1/2}$	6 - 16		8 - 24		12 - 32		19 - 35		20 - 45		28 - 55		32 - 80									
Inside diameter of elastomer (mm) $D_E$	14.2		19.2		26.2		29.2		36.2		46.2		60.5									
Clamping screw (ISO 4762)	E	3x M3		6x M4		4x M5		8x M5		8x M6		8x M8		8x M10								
Tightening torque of the clamping screw (Nm)		2		3		6		7		12		35		55								
Distance (mm) F																						
Moment of inertia per hub ( $10^{-3} \text{ kgm}^2$ ) $J_1/J_2$	0.004		0.015		0.05		0.1		0.3		0.85		9.2									
Approx. weight (kg)	0.08		0.12		0.3		0.5		0.9		1.5		9.6									
Speed standard ( $\text{min}^{-1}$ )	20,000		19,000		14,000		13,000		10,000		9,000		4,000									
Speed balanced ( $10^3 \text{ min}^{-1}$ )	53	63	40	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	13	8	

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 66 + 67.

ORDERING EXAMPLE	EK6	60	A	19	22.23	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK6 / 60 / A / 19 / 22.23 / XX; XX=finely balanced ISO G2.5 / 30,000 rpm)