

**EK7**

# WITH EXPANDING SHAFT

2 – 2,150 Nm



## ABOUT

### FEATURES

- for hollow shaft mounting
- short overall length
- solution for mismatched bore / shaft diameters


### MATERIAL

- **Hubs:** up to size 450 high strength aluminum; size 800 steel
- **Expanding shaft hub:** steel

- **Elastomer:** wear resistant thermally stable TPU

### DESIGN

One concentrically machined hub with clamping screw and curved jaws. One concentrically machined hub with expanding shaft system and curved jaws. Elastomer segment press fit for zero backlash; standard versions are electrically isolating.

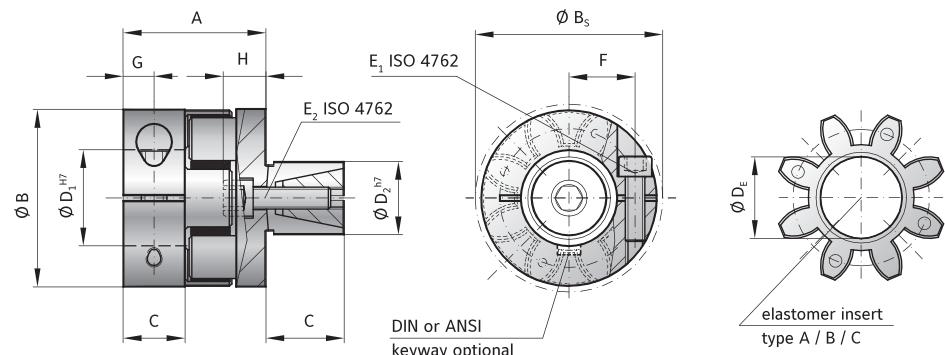

## MODEL EK7

SIZE	5			10			20			60			150			300			450			800				
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C		
Rated torque (Nm)	T <sub>KN</sub>	9	12	2	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240	
Max. torque*	(Nm)	T <sub>Kmax</sub>	18	24	4	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400
Overall length (mm)	A	22			28			40			46			51			68			76			94			
Outside diameter (mm)	B	25			32			42			56			66.5			82			102			136.5			
Outside diameter with screw head (mm)	B <sub>s</sub>	25			32			44.5			57			68			85			105			139			
Mounting length (mm)	C <sub>1</sub>	8			10.3			17			20			21			31			34			46			
Mounting length (mm)	C <sub>2</sub>	12			20			25			27			32			45			55			60			
Inside diameter range H7 (mm)	D <sub>1</sub>	4 - 12.7			5 - 16			8 - 25			12 - 32			19 - 36			20 - 45			28 - 60			35 - 80			
Outside diameter range h7 (mm)	D <sub>2</sub>	10 - 16			13 - 25			14 - 30			23 - 38			26 - 42			38 - 60			42 - 70			42 - 80			
Inside diameter of elastomer (mm)	D <sub>E</sub>	10.2			14.2			19.2			26.2			29.2			36.2			46.2			60.5			
Clamping screw (ISO 4762)	E <sub>1</sub>	M3			M4			M5			M6			M8			M10			M12			M16			
Tightening torque (Nm)	E <sub>1</sub>	2			4			8			15			35			70			120			290			
Clamping screw (ISO 4762)	E <sub>2</sub>	M4			M5			M6			M8			M10			M12			M16			M16			
Tightening torque (Nm)	E <sub>2</sub>	4			9			12			32			60			110			240			300			
Distance between centers (mm)	F	8			10.5			15.5			21			24			29			38			50.5			
Distance (mm)	G	4			5			8.5			10			11			15			17.5			23			
Length (mm)	H	7			7			10			11			16			20			27			27			
Moment of inertia D <sub>1</sub> (10 <sup>-3</sup> kgm <sup>2</sup> )	J <sub>1</sub>	0.002			0.003			0.01			0.04			0.08			0.3			0.66			8			
Moment of inertia D <sub>2</sub> (10 <sup>-3</sup> kgm <sup>2</sup> )	J <sub>2</sub>	0.002			0.01			0.04			0.1			0.2			1			2.6			9			
Approx. weight (kg)		0.04			0.05			0.12			0.3			0.5			0.9			1.5			7.6			
Speed standard (min <sup>-1</sup> )		15,000			13,000			12,500			11,000			10,000			9,000			8,000			4,000			
Speed balanced (10 <sup>3</sup> min <sup>-1</sup> )		57	65	43	53	63	40	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	8		

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 66 + 67.

\*Maximum transmittable torque of the clamping hub depends on the bore diameter (see EKL on page 68).

ORDERING EXAMPLE	EK7	20	A	24	19.05	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H7				●		
Expanding shaft D2 h7					●	
Special designation only (e.g. special bore tolerance).						
For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK7 / 20 / A / 24 / 19.05 / XX; XX=stainless steel)						