

EKZ

INTERMEDIATE SPACER

0.5 - 2,150 Nm



ABOUT

FEATURES


- high lateral misalignment
- easy to mount
- combine with any two hub designs

MATERIAL

- **Hubs:** high strength aluminum
- **Elastomer:** wear resistant thermally stable TPU

DESIGN

A concentrically machined spacer with curved jaws. 2x elastomer segment press fit for zero backlash; standard versions are electrically isolating.

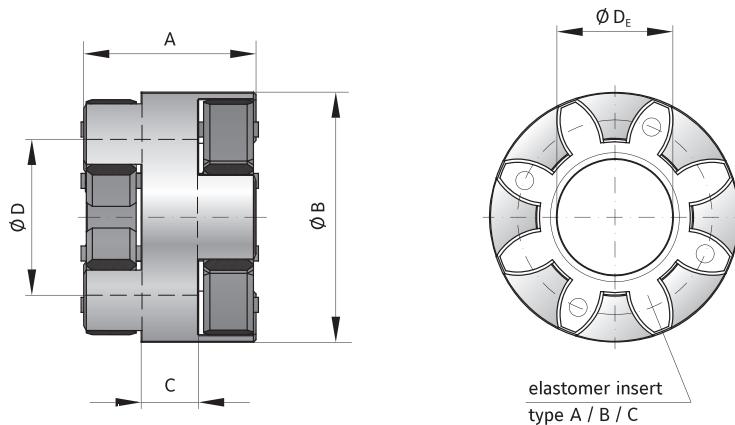

MODEL EKZ


SIZE	2	5	10	20	60	150	300	450	800
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C
Rated torque (Nm)	T _{KN}	2	2.4	0.5	9	12	2	12.5	16
Max. torque (Nm)	T _{kmax}	4	4.8	1	18	24	4	25	32
Overall length (mm)	A	20		26		30		39	
Outside diameter (mm)	B	16		25		32		42	
Hub length (mm)	C	9		9		9		10	
Inside diameter (mm)	D	9		15		18		25	
Inside diameter of elastomer (mm)	D _E	6.2		10.2		14.2		19.2	
Moment of inertia (10 ⁻³ kgm ²)	J ₁ /J ₂	0.0001		0.0005		0.002		0.008	
Approx. weight (kg)		0.007		0.02		0.04		0.09	
Speed standard (min ⁻¹)		15,000		15,000		13,000		12,500	
						11,000		10,000	
							9,000		8,000
									4,000

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 66 + 67.


ORDERING EXAMPLE	EKZ	60	A	XX
Model	●			
Size		●		
Elastomer insert type			●	Special designation only (e.g. non-standard length).

For custom features place an XX at the end of the part number and describe the special requirements (e.g. EKZ / 60 / A / XX; XX=anodized aluminum)


WORKS WITH FULL PRODUCT RANGE

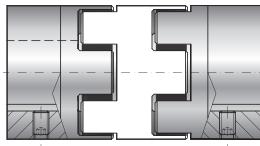


EK1

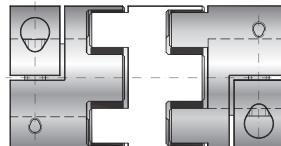

EK2

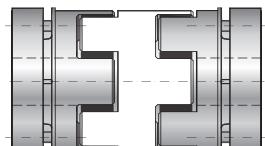

EK6

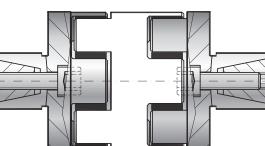

EK7